

GM-UP-DEL706-WS



Features


- Ceiling speaker with round, metallic front grille
- 6 W loudspeaker, transformer 100 V
- For background music and speech reproduction

Specifications

Loudspeaker system	1-way
Nominal noise power 100 V	1.5/3/6 W
Nominal noise power 8 Ω	6 W
Nominal impedance 100 V	6667/3333/1667 Ω
Sensitivity (1 W/1 m)	86 dB
Maximum SPL (6 W/1 m)	93 dB
Frequency range (-10 dB)	150–20'000 Hz
Coverage angle (-6 dB/1 kHz)	200°
Dimensions (Ø/Depth)	100/100 mm
Cutout	Ø 96 mm
Weight	0.6 kg
Color	White
Temperature range	-20°C to ~45°C
Protection	IP44
Measurement environment	Half-space free-field

Electrical connection


STANDARD

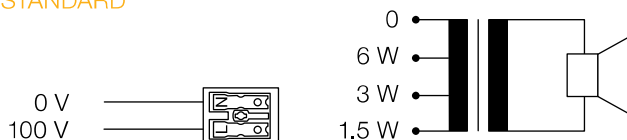

Ordering information | Accessories

GM-UP-DEL706-WS Loudspeaker 100 V
 Colors NCS or RAL available on request

Dimensions and fitting (measuring in mm)

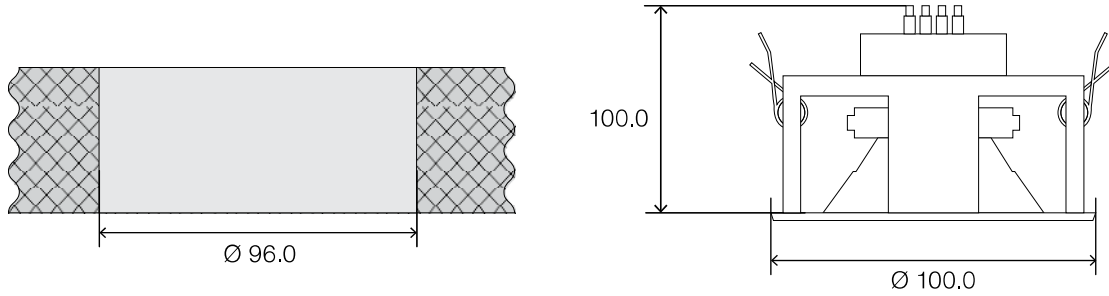

Frequency response

