

GM-3030




Features

- Ceiling speaker for ceiling mounting
- 20 W loudspeaker, transformer 100 V
- 2 separat tweeter
- With resonance box
- Special rubber strip against resonance transmission
- The 2-way high-performance system provides a very good music and voice reproduction

Specifications

Loudspeaker system	2-way coaxial
Nominal noise power 100 V	2/5/10 W
Nominal impedance 100 V	5000/2000/1000 Ω
Sensitivity (1 W/1 m)	87 dB
Maximum SPL (10 W/1 m)	96 dB
Frequency range (-10 dB)	75–20'000 Hz
Coverage angle (-6 dB/1 kHz)	155° (h) × 155° (v)
Dimensions (W × H × D)	250 × 400 × 125 mm
Perforation	200 × 200 mm
Weight	3.8 kg
Color	Black
Temperature range	-20 °C to -45 °C
Protection	IP34
	Hole plate Ø 2.5–12 mm
Measurement enviroment	Half-space free-field

Electrical connection

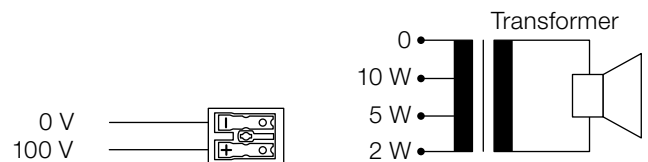


Certificates

EN 60268-5

Ordering information | Accessories

GM-3030 Loudspeaker 100 V

Dimensions and fitting (measuring in mm)

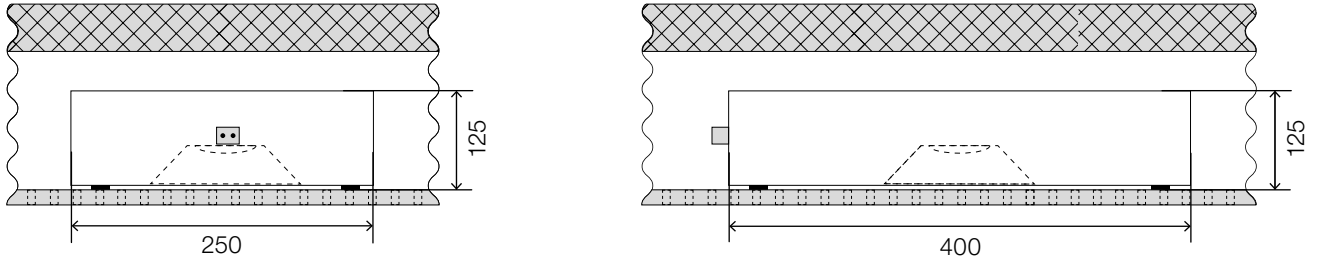

NOTE: Permeability of the perforated plate must be at least 50%

Frequency response

