

GM-3450




Features

- Ceiling speaker with round, metallic front grille
- 6 W loudspeaker, transformer 100 V
- For background music and speech reproduction

Specifications

Loudspeaker system	1-way
Nominal noise power 100 V	2 / 4 / 6 W
Nominal noise power 8 Ω	6 W
Nominal impedance 100 V	5000 / 2500 / 1667 Ω
Sensitivity (1 W / 1 m)	89.0 dB
Maximum SPL (6 W / 1 m)	97.0
Frequency range (-10 dB)	100–20'000 Hz
Coverage angle (-6 dB / 1 kHz)	200°
Dimensions (\varnothing / Depth)	105 / 72 mm
Cutout	\varnothing 85 mm
Weight	0.5 kg
Color	White RAL 9010
Temperature range	-20 °C to ~45 °C
Protection	IP44
Measurement environment	Half-space free-field


Electrical connection

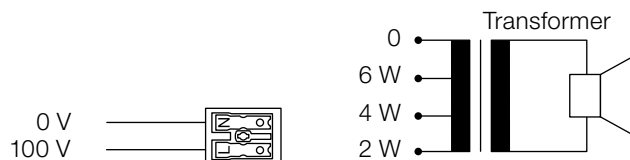

Ordering information | Accessories

GM-3450	Loudspeaker 100 V
Colors	NCS or RAL available on request

Dimensions and fitting (measuring in mm)

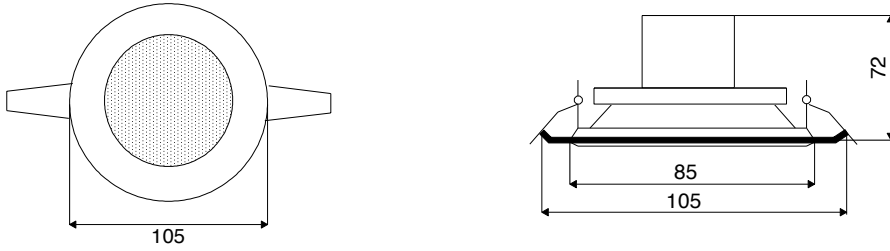

Frequency response

