

# GM-4010




## Features

- Ceiling speaker with impact resistant, square steel grille
- 10 W, 2-way coaxial-chassis, transformer 100 V
- The 2-way high-performance system provides a very good music and voice reproduction

## Specifications

Loudspeaker system	2-way coaxial
Nominal noise power 100 V	1.5/3/6 W
Nominal impedance 100 V	6666/3333/1666 $\Omega$
Sensitivity (1 W/1 m)	94 dB
Maximum SPL (6 W/1 m)	103 dB
Frequency range (-10 dB)	150–20'000 Hz
Coverage angle (-6 dB/1 kHz)	165° (h) × 165° (v)
Dimensions (W × H × D)	201 × 201 × 85 mm
Cutout (W × H)	235 × 235 mm
Weight	1.4 kg
Color	Black
Temperature range	-20 °C to ~45 °C
Protection	IP44
Measurement environment	Half-space free-field

## Electrical connection

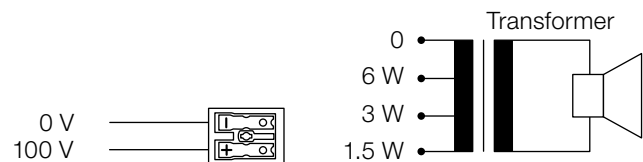


## Certificates

EN 60268-5

## Ordering information | Accessories

GM-4010	Loudspeaker 100 V
GM-4006	Housing
GM-4007	Metallic front grille

**Dimensions and fitting (measuring in mm)**

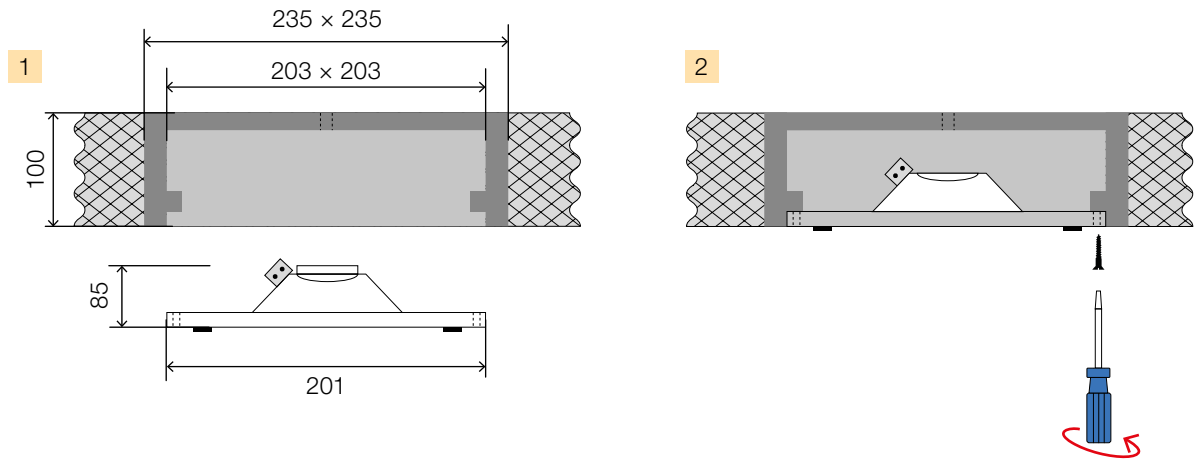

**Frequency response**

