

GM-5220-EN5424



Features



- Round cabinet speaker with metal housing
- 10 W loudspeaker, transformer 100 V
- Incl. mounting brackets for wall or ceiling mounting
- Good music and voice reproduction

Specifications

Loudspeaker system	1-way
Nominal noise power 100 V	1.5/3/6/10 W
Nominal impedance 100 V	6666/3333/1667/1000 Ω
Sensitivity (1 W/1 m)	100.6 dB
Sensitivity (1 W/4 m)	80.1 dB
Maximum SPL (10 W/1 m)	110.6 dB
Maximum SPL (10 W/4 m)	89.2 dB
Frequency range (-10 dB)	225-22'200 Hz
Coverage angle (-6 dB)	H 180°/180°/102.5°/65° V 180°/180°/102.5°/65°
Dimensions (Ø/Depth)	170/75 mm
Material	Metal housing
Weight	1.2 kg
Color	White RAL 9010
Temperature range	-20°C to ~45°C
Protection	IP44
Measurement environment	Half-space free-field

Electrical connection

red = 0 V | black = 100 V
3 pole ceramic terminal




Certificates

EN 54-24 (1438/CPD/0245)


Ordering information | Accessories

GM-5220-EN5424 Loudspeaker accordance to EN 54-24
Colors NCS or RAL available on request


Dimensions and fitting (measuring in mm)

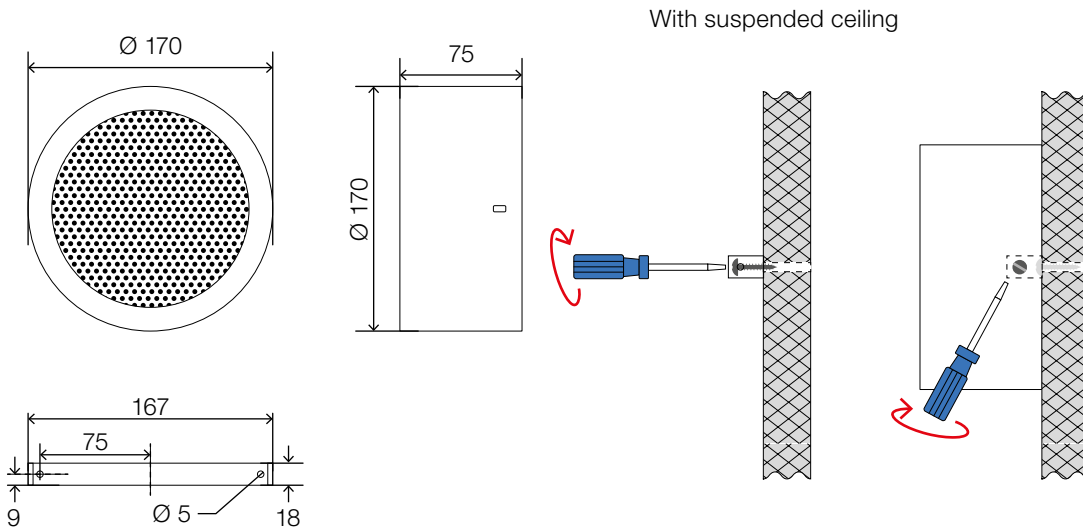


Frequency response | Polar plot

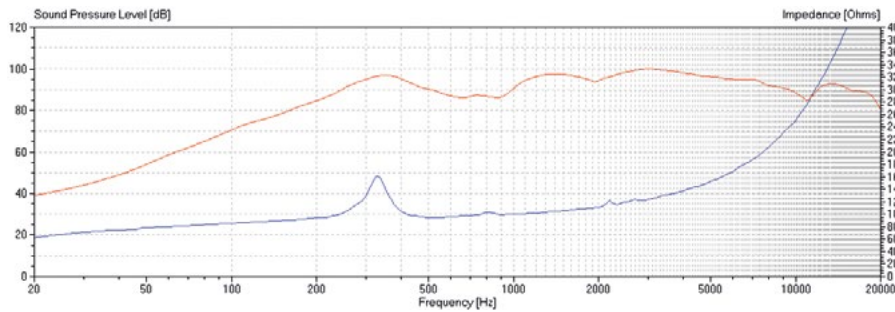

Horizontal

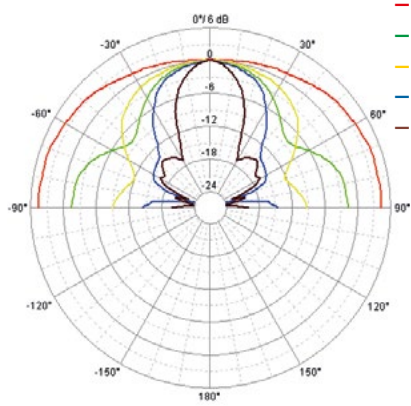

- 500 HZ
- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz

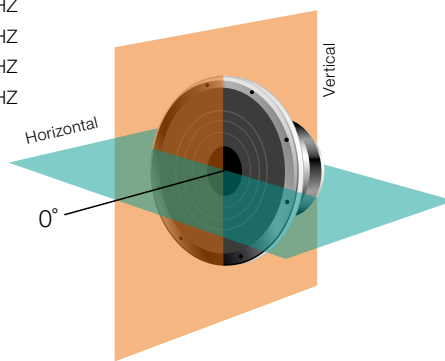

Vertical

