

# GM-5400




## Features

- Rectangular cabinet speaker with metal housing
- 9 W loudspeaker, transformer 100 V
- Easy mounting solution (snap lock) for wall and ceiling
- Good music and voice reproduction

## Specifications

Loudspeaker system	1-way
Nominal noise power 100 V	1.5/3/6 W
Nominal impedance 100 V	6667/3333/1667 Ω
Sensitivity (1 W/1 m)	86.6 dB
Maximum SPL (6 W/1 m)	94.4 dB
Frequency range (-10 dB)	270–19'000 Hz
Coverage angle (-6 dB)	H 180°/180°/105°/121°
(0.5/1/2/4 kHz)	V 180°/180°/105°/65°
Dimensions (W x H x D)	110 x 200 x 70 mm
Weight	1.2 kg
Color	White
Temperature range	-20°C to ~45°C
Protection	IP44
Measurement environment	Half-space free-field

## Electrical connection

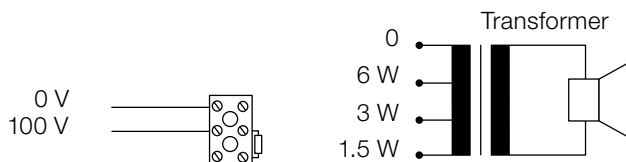


## Certificates

EN 60268-5


## Ordering information | Accessories

GM-5400	Loudspeaker 100 V
Colors	NCS or RAL available on request


Dimensions and fitting (measuring in mm)

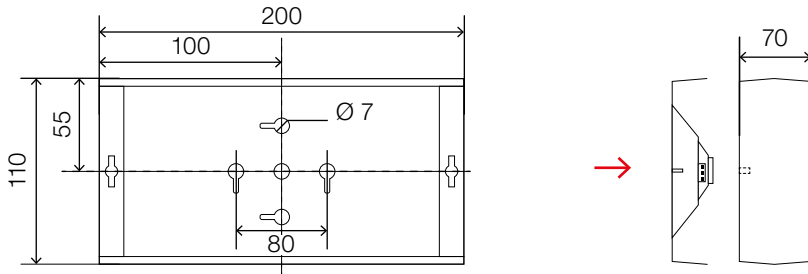


1

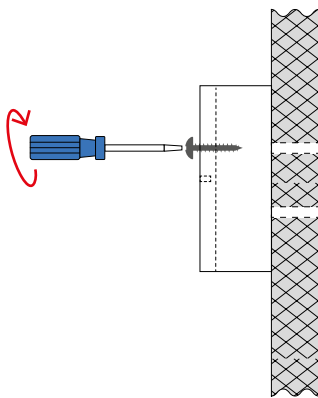


2

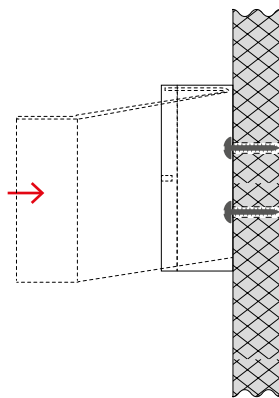


3

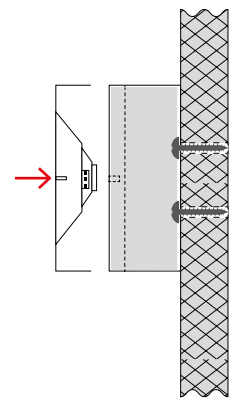


Frequency response | Polar plot

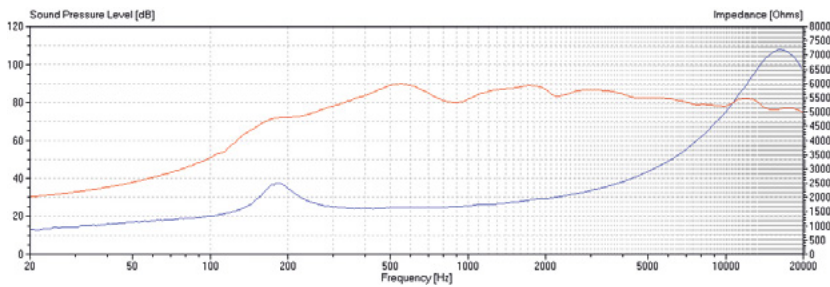

Horizontal

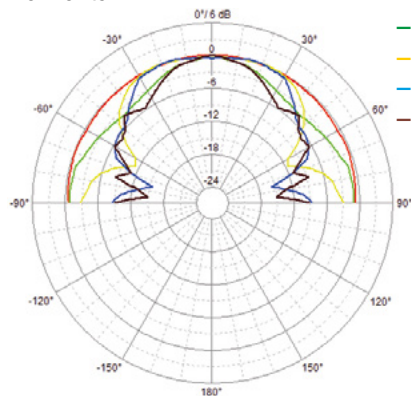

- 500 HZ
- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz

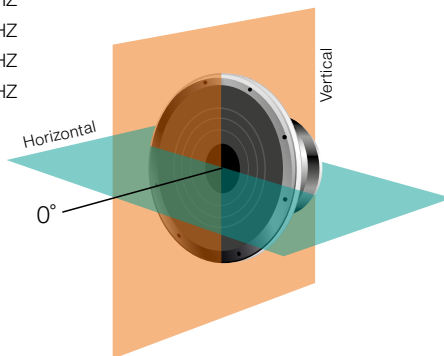

Vertical

