

# GM-5402




## Features

- Rectangular cabinet speaker with metal housing
- 9 W loudspeaker, transformer 100 V with integrated volume control
- Easy mounting solution (snap lock) for wall and ceiling
- Very good music and voice reproduction

## Specifications

Loudspeaker system	1-way
Nominal noise power 100 V	1.5/3/6 W
Nominal impedance 100 V	6667/3333/1666 $\Omega$
Sensitivity (1 W/1 m)	89 dB
Maximum SPL (6 W/1 m)	97 dB
Frequency range (-10 dB)	250–13'000 Hz
Coverage angle (-6 dB/1 kHz)	170° (h) × 170° (v)
Dimensions (W x H x D)	110 × 200 × 70 mm
Weight	1.3 kg
Color	White
Temperature range	-20°C to ~45°C
Protection	IP44
Measurement environment	Half-space free-field

## Electrical connection

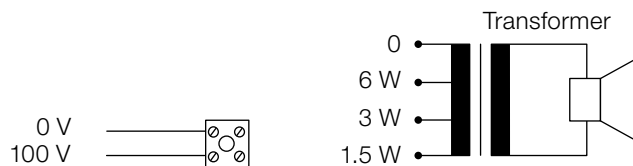


## Certificates

EN 60268-5

## Ordering information | Accessories


GM-5402	Loudspeaker 100 V
Colors	NCS or RAL available on request

**Dimensions and fitting (measuring in mm)**

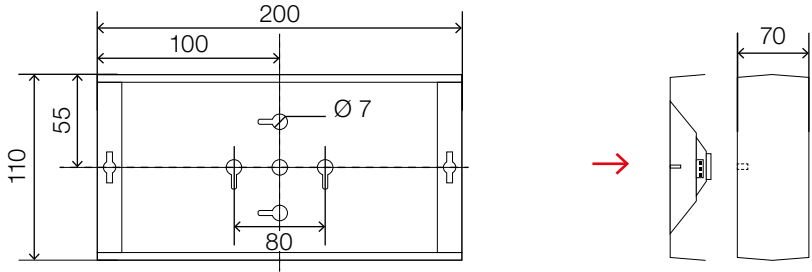


IMPORTANT: Remove the orange link if a 3-wires-system is in use!


1

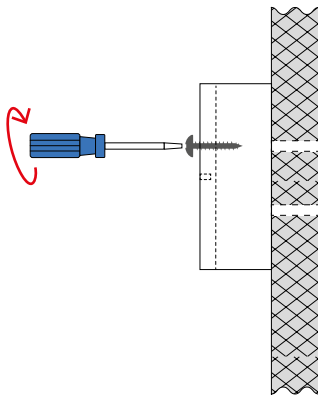

2

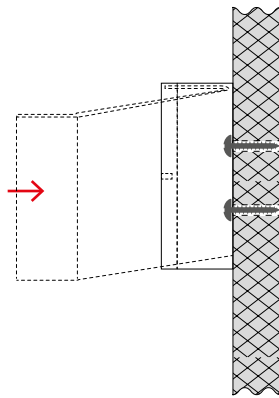

3

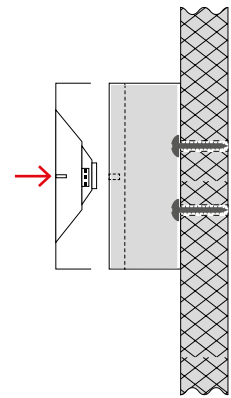

**Frequency response**

