

GM-6260-EN5424



Features



- Spherical Loudspeaker suitable for rooms with high ceilings e.g. supermarkets
- 30 W loudspeaker, transformer 100 V
- Fire-resistant, hardly inflammable
- Providing coverage angles of 325° horizontal and 325° vertical, for providing an even spread of sound over a big area

Specifications

Loudspeaker system	2-way
Nominal noise power 100 V	10/20/30 W
Sensitivity (1 W/1 m)	102.5 dB
Sensitivity (1 W/4 m)	80.0 dB
Maximum SPL (30 W/1 m)	115.0 dB
Maximum SPL (30 W/4 m)	96.0 dB
Frequency range (-10 dB)	70–20'000 Hz
Coverage angle (-6 dB)	H 188°/325°/106°/66°
(0.5/1/2/4 kHz)	V 188°/325°/106°/66°
Dimensions	Ø 220 mm
Material	Metal
Weight	ca. 2.4 kg
Color	White RAL 9010
Temperature range	-20 °C to ~45 °C
Protection	IP44
Measurement environment	Free-field

Electrical connection

4 pole clamp




Certificates

EN 54-24 (1293-CPR-0430)


Ordering information | Accessories

GM-6260-EN5424 Loudspeaker accordance to EN 54-24
 Colors NCS or RAL available on request


Dimensions and fitting (measuring in mm)

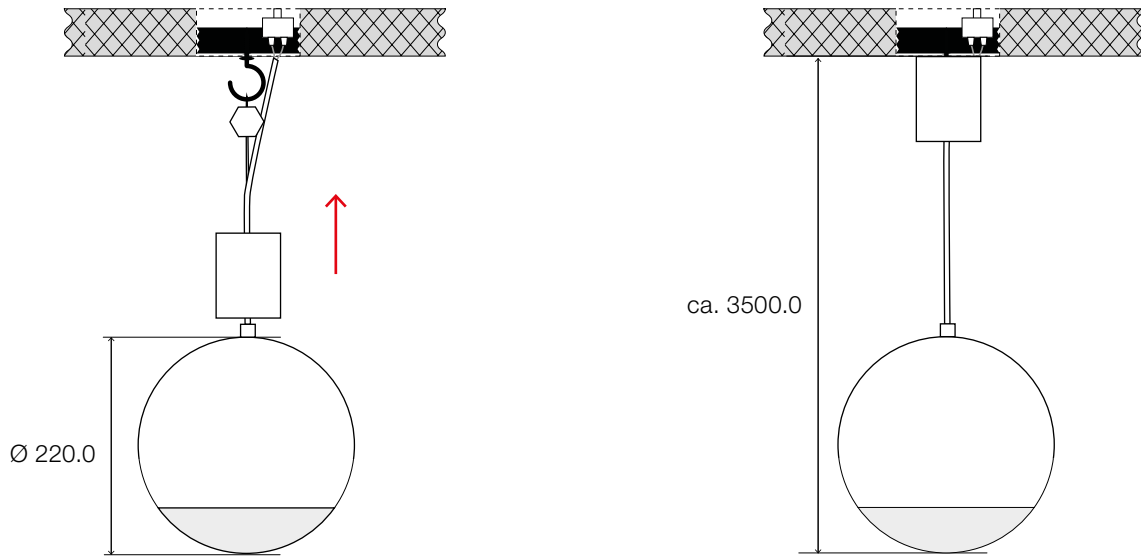


Frequency response | Polar plot

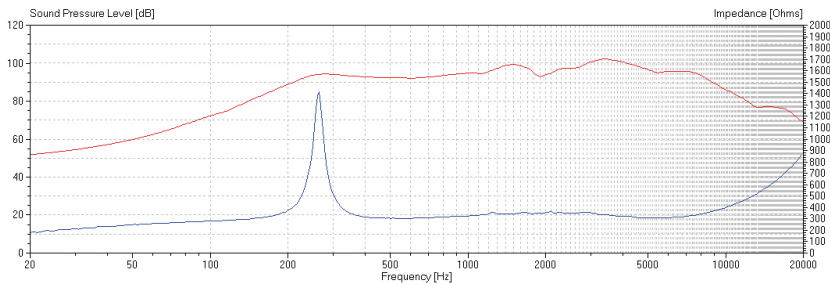

Horizontal

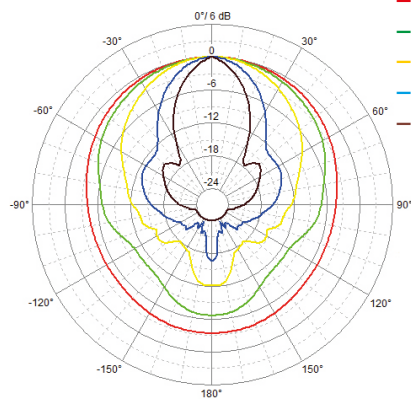

- 500 HZ
- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz

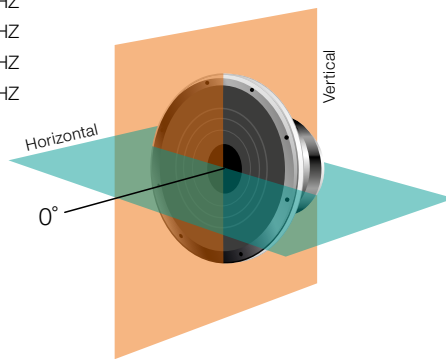

Vertical

