

# GM-6300




## Features

- Pendant loudspeaker for room with high ceiling – also possible for wall mounting (optionally)
- 2-way bass reflex system with 32 watts of nominal music power for excellent music pleasure and a high linguistic intelligibility
- Cable available in black or white, length can be selected

## Specifications

Loudspeaker system	2-way
Nominal noise power 100 V	4/8/16 W
Nominal impedance 100 V	2500/1250/625 $\Omega$
Sensitivity (1 W/1 m)	89.0 dB
Maximum SPL (16 W/1 m)	102.5 dB
Frequency range (-10 dB)	73–20'000 Hz
Coverage angle (-6 dB)	H 250°/130°/90°/60°
(0.5/1/2/4 kHz)	V 250°/130°/90°/60°
Dimensions (Ø/D)	Ø 255 / 315 mm
Material	ABS 765A
Weight	3 kg
Color	Black or white
Temperature range	-20 °C to ~45 °C
Protection	IP44
Measurement environment	Free-field

## Electrical connection

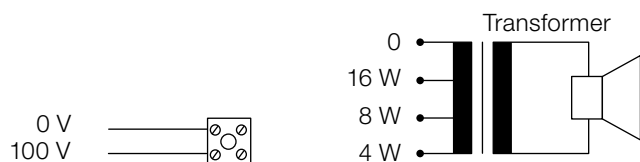



## Ordering information | Accessories

GM-6300	Loudspeaker 100 V
GM-6300-WALL	Wall mounting set
Colors	NCS or RAL available on request


**Dimensions and fitting (measuring in mm)**

1 Separated connecting cable and safety rope


2 Connecting cable with integrated safety rope

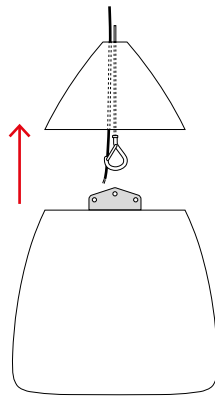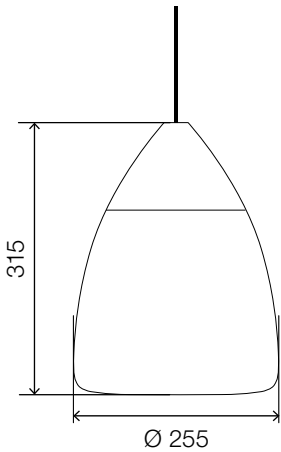


\* Not included in delivery

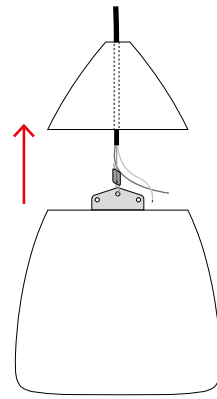


**Frequency response**

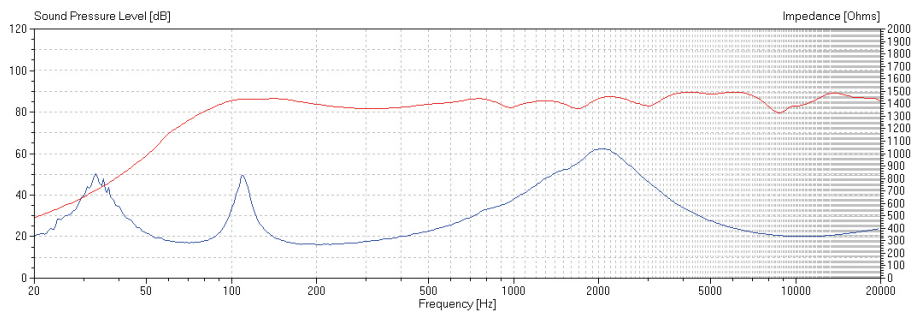

Horizontal

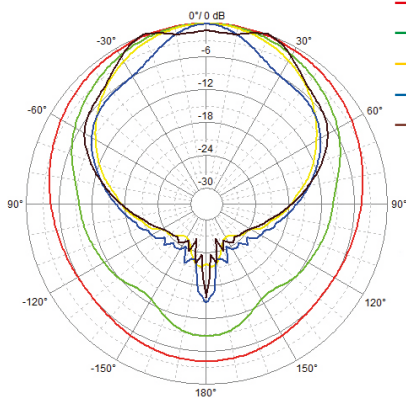

- 500 HZ
- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz

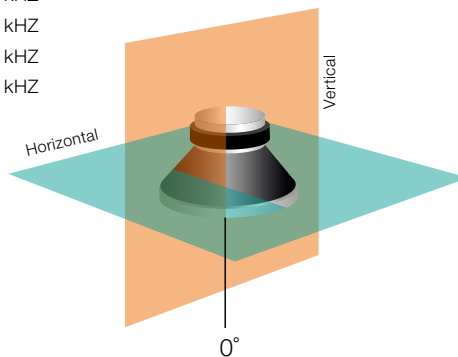

Vertical

