

# GM-6310




## Features

- Pendant loudspeaker for room with high ceiling – also possible for wall mounting (optionally)
- 2-way bass reflex system with 20 watts of nominal music power for excellent music pleasure and a high linguistic intelligibility
- Transparent cable (selectable length) with supporting element

## Specifications

Loudspeaker system	2-way
Nominal noise power 100 V	2.5/5/10/20 W
Nominal impedance 100 V	4000/2000/1000/500 $\Omega$
Sensitivity (1 W/1 m)	85.4 dB
Maximum SPL (20 W/1 m)	98.4 dB
Frequency range (-10 dB)	78–20'000 Hz
Coverage angle (-6 dB)	H 360°/160°/107°/82°
(0.5/1/2/4 kHz)	V 360°/160°/107°/82°
Dimensions (Ø/D)	Ø 190 / 230 mm
Material	ABS 765A
Weight	2 kg
Color	Black or white
Temperature range	-20 °C to ~45 °C
Protection	IP44
Measurement environment	Free-field

## Electrical connection

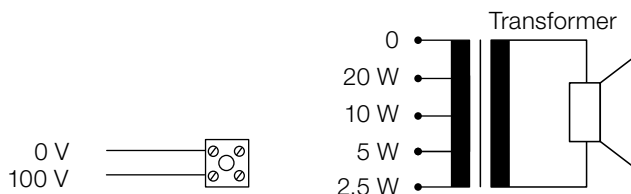




## Ordering information | Accessories

GM-6310	Loudspeaker 100 V
GM-6310-WALL	Wall mounting set
Colors	NCS or RAL available on request


**Dimensions and fitting (measuring in mm)**

1 Separated connecting cable and safety rope


2 Connecting cable with integrated safety rope (standard)

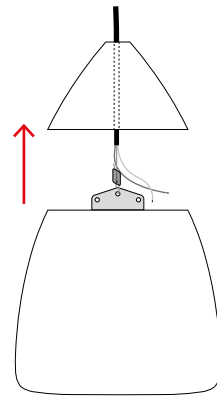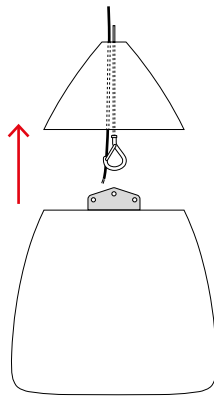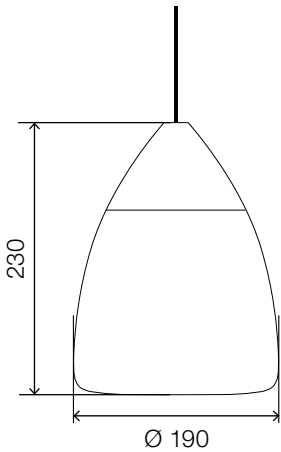


**Frequency response**

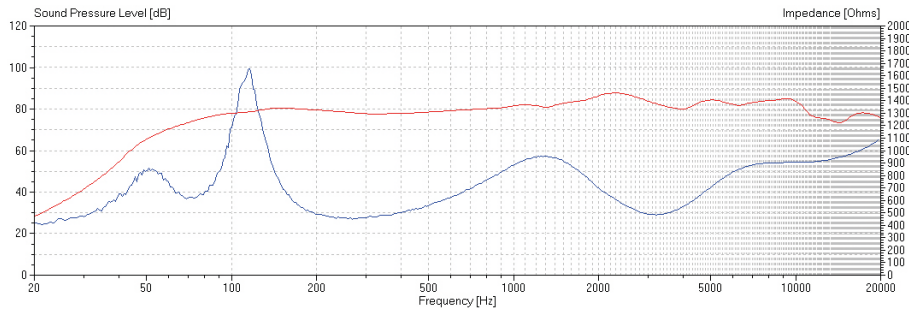

Horizontal

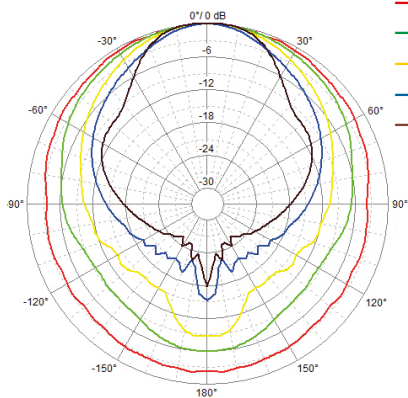

- 500 HZ
- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz

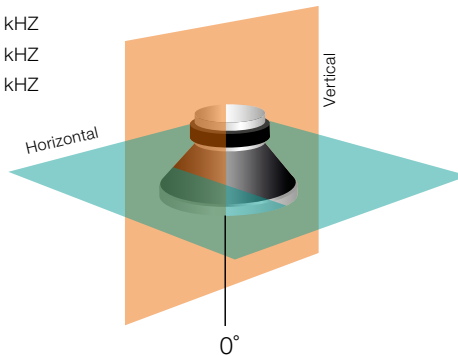

Vertical

