

GM-8110



Features


- Hi-Fi High-capacity compact box for surface, wall- or ceiling mounting
- 30 W loudspeaker, transformer 100 V
- Supplied with U-bracket or ball-holder
- Very easy and quick to install
- excellent music and voice playback

Specifications

Loudspeaker system	2-way
Nominal noise power 100 V	3/6/9/15 W
Nominal noise power 8 Ω	30 W
Nominal impedance 100 V	3333/1666/1111/666 Ω
Sensitivity (1 W/1 m)	89 dB
Maximum SPL (16 W/1 m)	100.8 dB
Frequency range (-10 dB)	145 – 15'000 Hz
Coverage angle (-6 dB)	H 360°/150°/65°/265°
(0.5/1/2/4 kHz)	V 360°/180°/180°/90°
Dimensions (W × H × D)	258 × 500 × 258 mm
Weight	1.5 kg
Color	Black or white
Temperature range	-20°C to ~50°C
Protection	IP44
Measurement environment	Free-field

Electrical connection

black = 0 V | red = 100 V

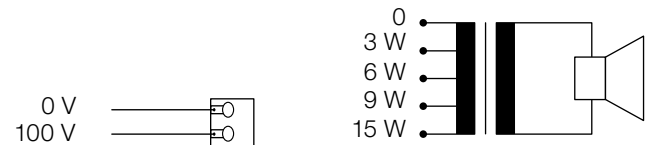


Certificates

EN 60268-5


Ordering information | Accessories

GM-8110-SW	Loudspeaker 100 V incl. U-bracket, black
GM-8110-WS	Loudspeaker 100 V incl. U-bracket, white
GM-8439	Ball-holder, black
GM-8440	Ball-holder, white
Colors	NCS or RAL available on request


Dimensions and fitting (measuring in mm)

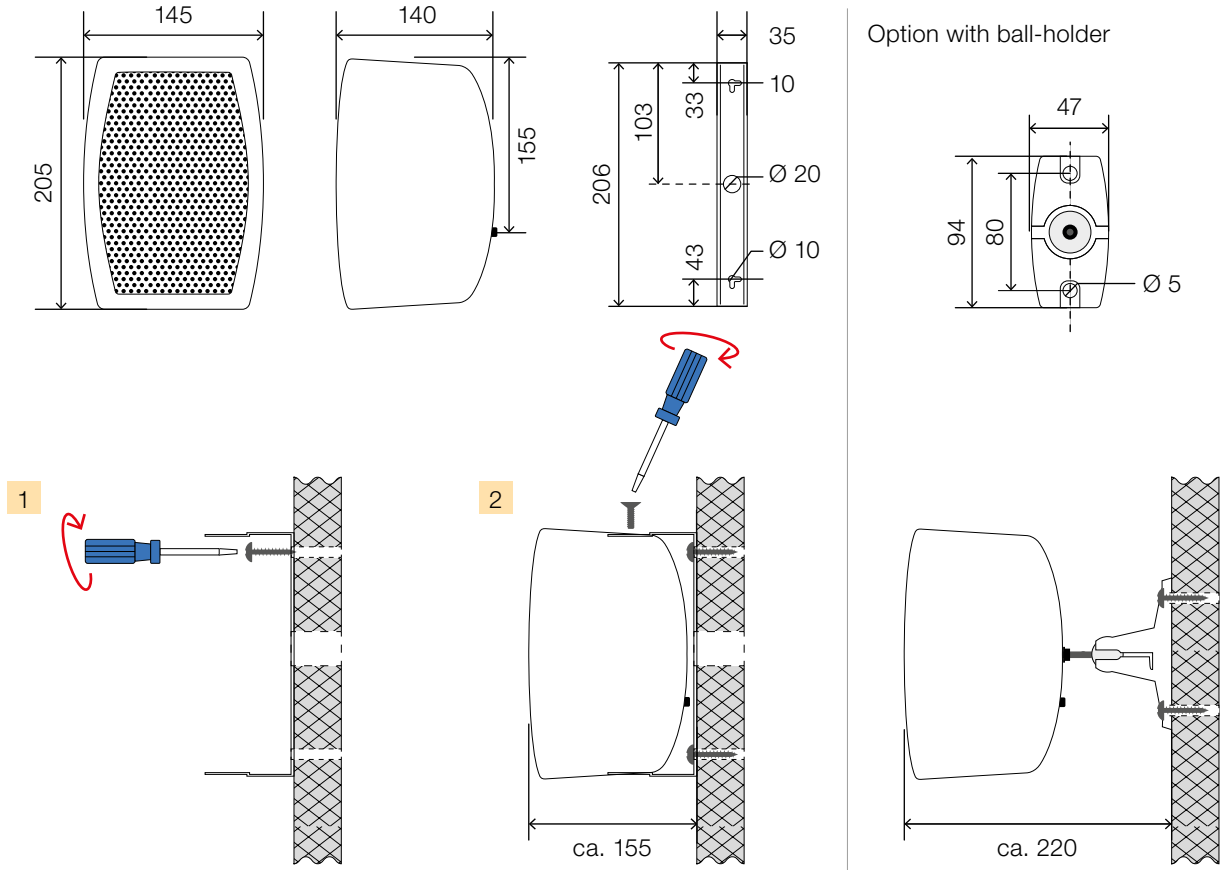


Frequency response | Polar plot

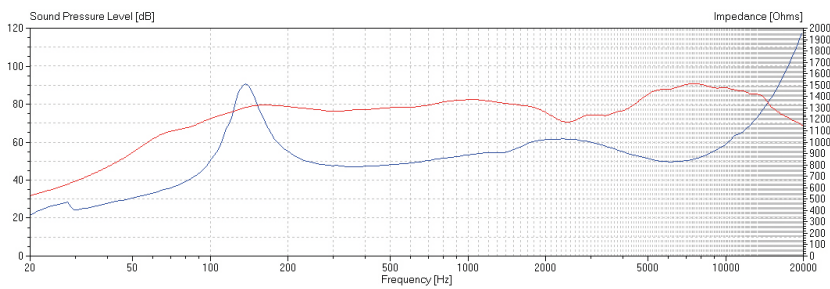

Horizontal

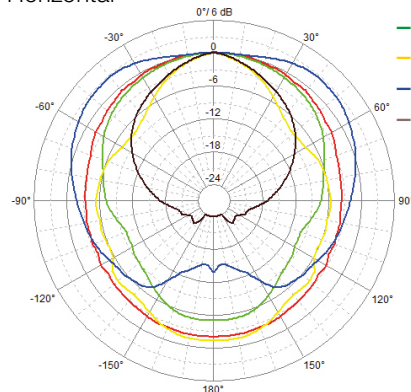

- 500 HZ
- 1 kHz
- 2 kHz
- 4 kHz
- 8 kHz

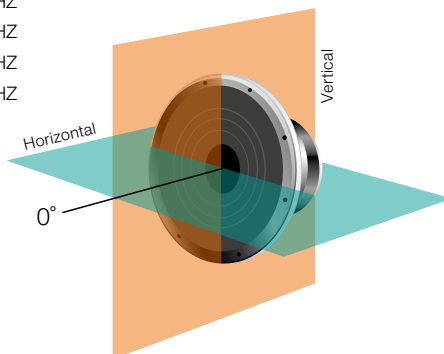

Vertical

