

GM-8130-WS



Features


- Hi-Fi High-capacity compact box for surface, wall- or ceiling mounting
- 30 W loudspeaker, transformer 100 V
- Supplied with U-bracket or ball holder
- Very easy and quick to install
- excellent music and voice playback

Specifications

Loudspeaker system	2-way
Nominal noise power 100 V	2/5/10/20 W
Nominal noise power 8 Ω	30 W
Nominal impedance 100 V	5000/2000/1000/500 Ω
Sensitivity (1 W/1 m)	91.8 dB
Maximum SPL (30 W/1 m)	104.8 dB
Frequency range (-10 dB)	120 – 15'200 Hz
Coverage angle (-6 dB)	H 200°/160°/90°/65°
(0.5/1/2/4 kHz)	V 360°/160°/150°/50°
Dimensions (W x H x D)	205 x 285 x 190 mm
Weight	3 kg
Color	White
Temperature range	-20 °C to ~50 °C
Protection	IP44
Measurement environment	Free-field

Electrical connection

black = 0 V | rot = 100 V

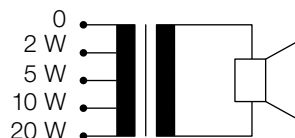


Certificates

EN 60268-5

Ordering information | Accessories

GM-8130-WS	Loudspeaker 100 V incl. U-bracket, white
GM-8440	Ball-holder, white
Colors	NCS or RAL available on request

Dimensions and fitting (measuring in mm)

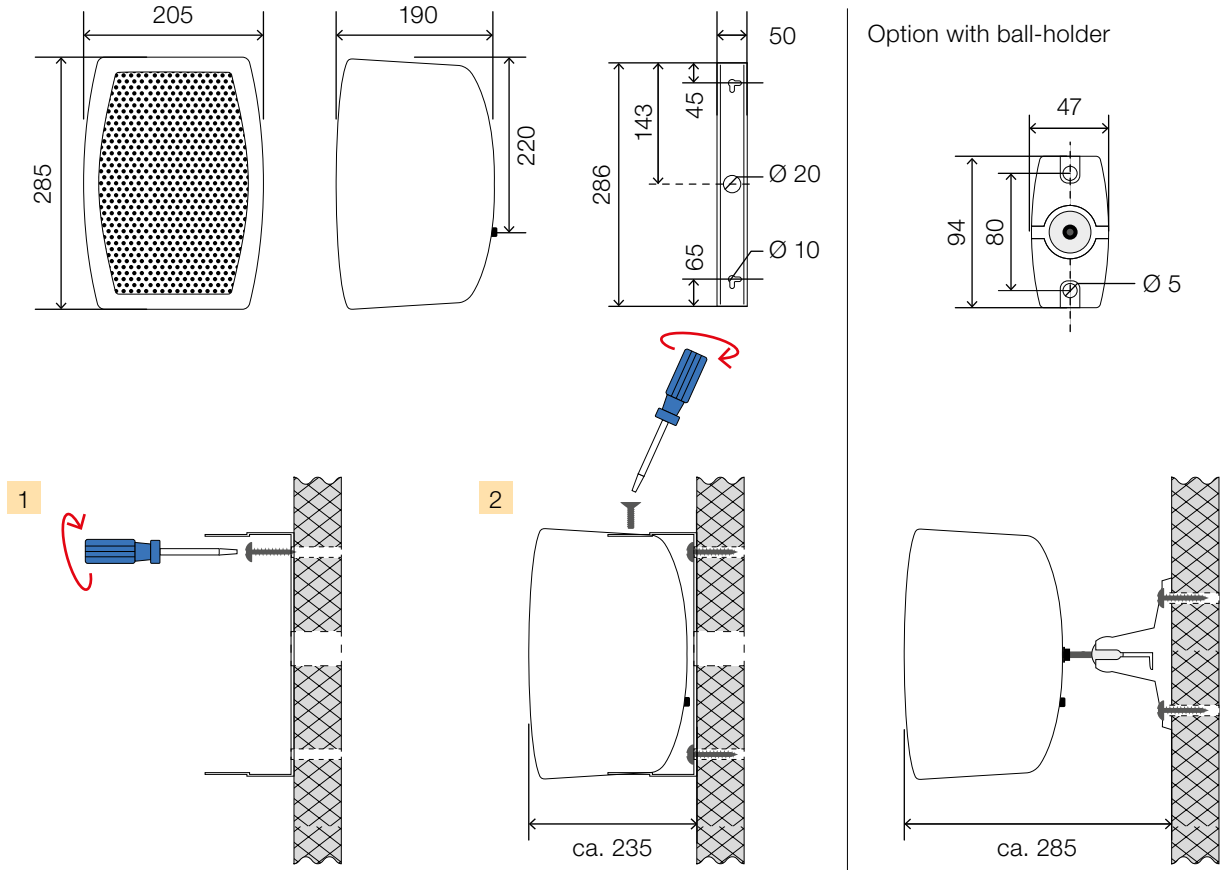

Frequency response | Polar plot

