

# GM-SUB-100



## Features

- 100 V high efficiency subwoofer, for powerful bass even at low power
- The subwoofer housing has been developed for the highly dynamic speaker chassis and provides a great sound experience, regardless of whether classical or pop music
- For professional use in churches, fitness areas and multi-purpose halls


## Specifications

Loudspeaker system	1-way
Nominal noise power 100 V	12.5/25/50/100 W
Nominal noise power 8 $\Omega$	100 W
Nominal impedance 100 V	800/400/200/100 $\Omega$
Sensitivity (1 W/1 m)	88 dB
Maximum SPL (100 W/1 m)	108 dB
Frequency range (-10 dB)	54–200 Hz
Dimensions (W x H x D)	370 x 510 x 400 mm
Cutout for mounting frame	380 x 520 mm
Weight	22 kg
Color	Black or white
Temperature range	-20 °C to ~45 °C
Protection	IP22
Measurement environment	Free-field

## Electrical connection

### SPEAKON


Connector/Chassis, 4 pole

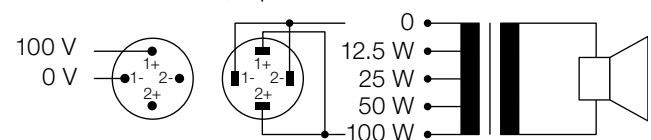

## Ordering information | Accessories

GM-SUB-100-SW	Subwoofer black
GM-SUB-100-WS	Subwoofer white
GM-8560-SUB-100	Mounting frame
GM-8910	Frequency separating filter
GM-8565-SUB-100	U-bolts, white, including preparation for safety cable
Art. 8463	Safety cable 3 m, 2 snap hooks, maximum load 90 kg
Colors	NCS or RAL available on request

**Dimensions and fitting (measuring in mm)**

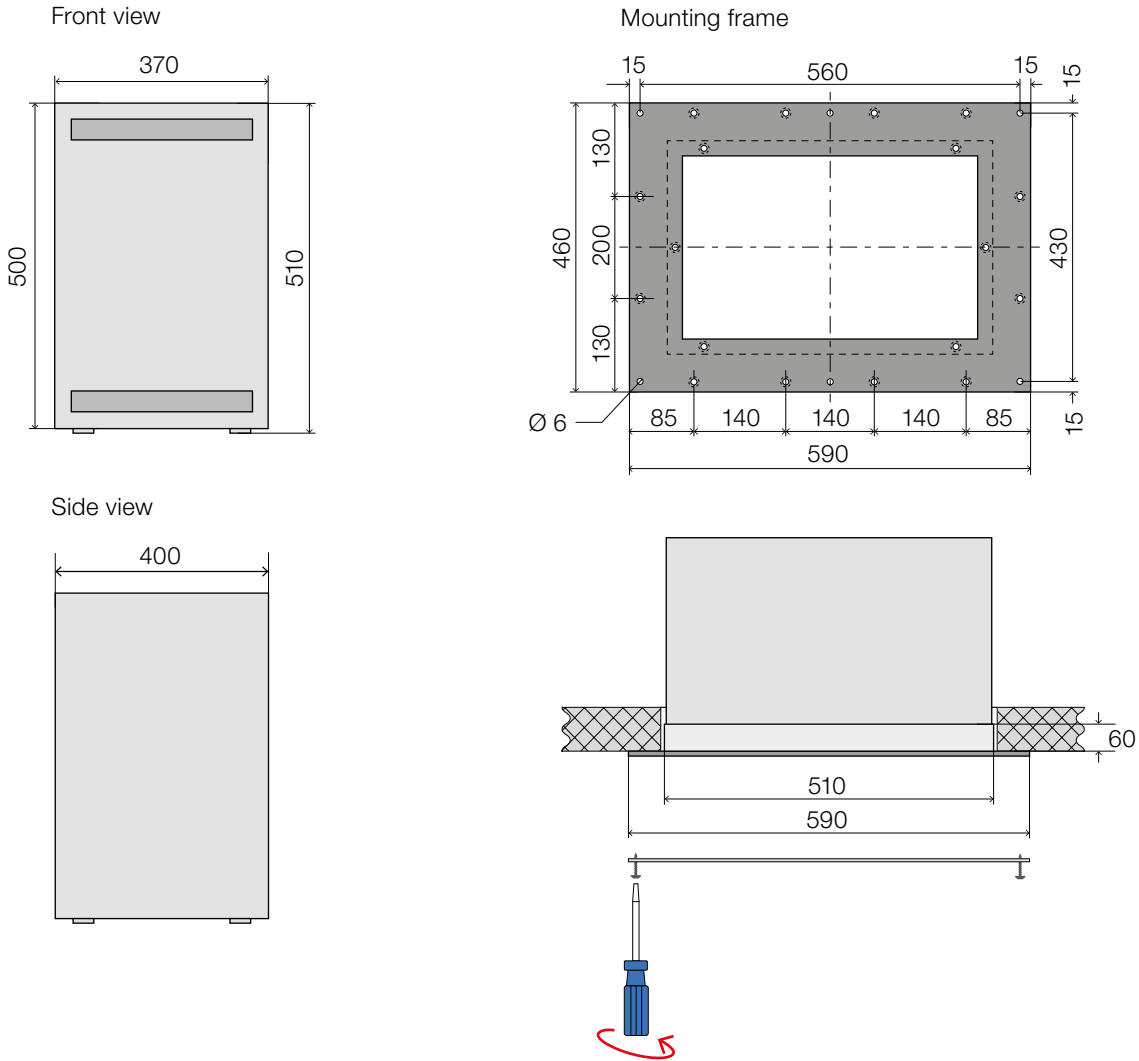

**Frequency response**

