

SZB-19-XX

EN 54-16 certified rack for voice alarm systems

Description

Basic composition

- Front door with glass panel
- Locked rear wall and side walls
- Handle with lock and cylinder key. Compatible with: KABA 1414 (Euro) or KESO Omega 41 (2000/4000)
- Cable entry in the rear wall and bottom plate
- Slide casters for 500 kg load
- Ventilated roof, IP 30 protection
- Material: steel
- Option: with ceiling fan
- Option: plinth, height 100 mm, RAL 7035

Technical specifications

Name	Dim. (W × D × H)	Weight
SZB-19-15	600 × 600 × 910 mm (15 U)	60 kg
SZB-19-24	600 × 600 × 1310 mm (24 U)	80 kg
SZB-19-33	600 × 600 × 1710 mm (33 U)	93 kg
SZB-19-39	600 × 600 × 1977 mm (39 U)	101 kg
SZB-19-42	600 × 600 × 2110 mm (42 U)	109 kg

incl. ventilated roof and slide casters

Color	RAL 7035
Protection	IP30

Certificate


EN 54-16 (1438-CPR-0176)

Ordering informations

Name	Dimension	Article N°
SZB-19-15	15 U	63-5510976-01-01
SZB-19-24	24 U	63-5510918-01-01
SZB-19-33	33 U	63-5510977-01-01
SZB-19-39	39 U	63-5510978-01-01
SZB-19-42	42 U	63-5510917-01-01

Options:

Ceiling fan	63-5510920-01-01
Thermostat	63-5510921-01-01
Plinth, height 100 mm, RAL 7035	63-5510922-01-01

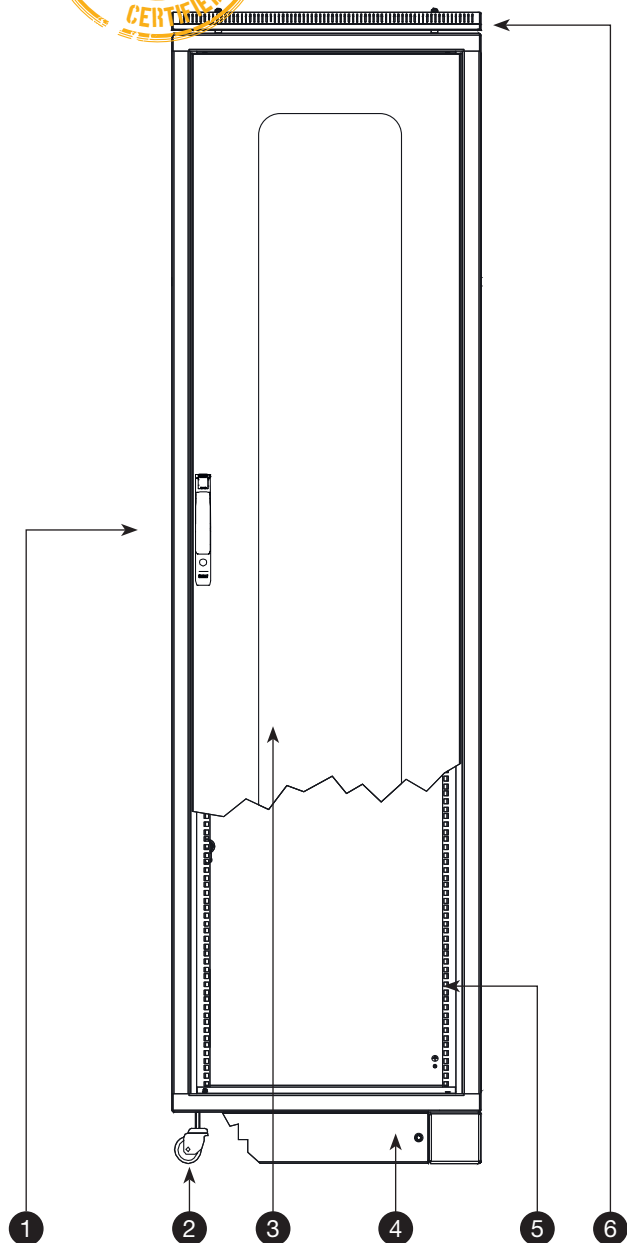

Front view

- 1 Handle with key lock
- 2 Slide casters
- 3 Door with glas
- 4 Plinth (option)
- 5 Mounting brackets
- 6 Roof with ventilation grill