


# APS-54.1

Function module with 4 pushbuttons

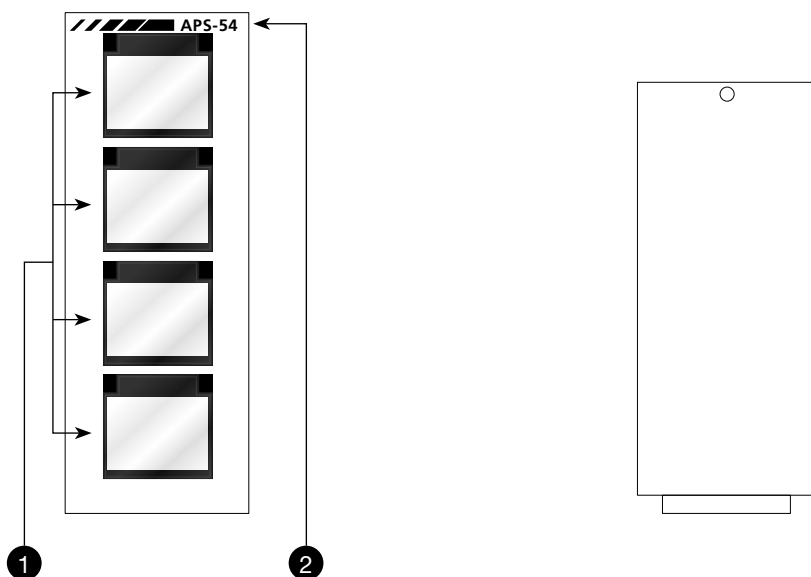

## Front view (FRS)

- 1 Pushbuttons with optional protective cover  
 2 Model code

## Rear view (RWS)

## Description

### Designation and function

Function module with a maximum of four large illuminated pushbuttons

### Possible functions of the pushbuttons

- Switch
- Pushbutton
- Programmable illuminaton

### Action of the buttons and the control contacts

According to the programming of the APS-990 processor module and the settings on the module

### Use of the module

Together with other APS components

### Settings on the module

Configuration switch/pushbutton

### Rear panel (RWS)


RWS-00

## Ordering information

Color of the lamp cap	Article N°
White	9370
Green	9371
Yellow	9372
Red	9373
Orange	9374
Blue	10908

**Technical specifications**

**Configuration switch / pushbutton**



**Data**

**Removal of the module from a unit**

- a) CAUTION: the amplifier system must be disconnected from mains and battery supply!
- b) Remove the covering strips at the cabinet
- c) Unscrew the mounting screws
- d) Pulling out the module forwards

**Tasks of the module**

- Detecting of the conditions of the keys and transmission to the processor module APS-990
- Display of conditions

**Data transfer between APS-54.1 and APS-990**

Via the I<sup>2</sup>C bus

**Note**

Define number of keys and protective covers when ordering!

**General information**

LEDs in keys	18 V/8 mA
Current consumption (max.)	40 mA
Weight (incl. RWS)	0.45 kg

**Function of the module**

According to the programming of the APS-990 and the settings on the module

**Important**

The use must be in accordance with the programming!